


How to Configure Remote Phonebook on Htek IP Phones



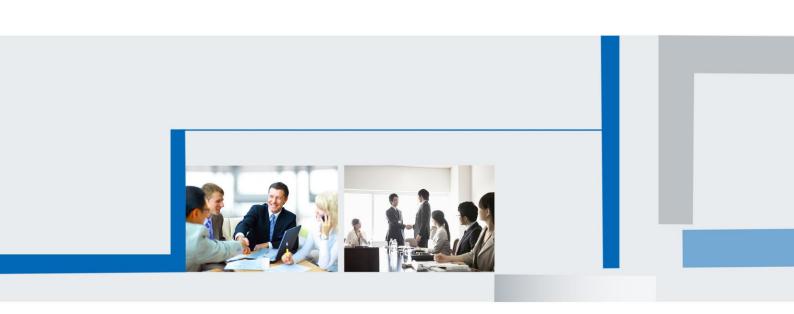

1. To generate Remote xml file on server.

For example: Phonebook.xml under the path: 192.168.0.254/ phonebook

The contents of Phonebook.xml are as follows:

- <?xml version="1.0" encoding="UTF-8"?>
- <PhoneDirectory>
- <DirectoryEntry>
- <Name> Remote test1</Name>
- <Telephone>312</Telephone>
- </DirectoryEntry>
- <DirectoryEntry>
- <Name> Remote test2</Name>
- <Telephone>122</Telephone>
- <Telephone>132</Telephone>
- <Telephone>142</Telephone>
- </DirectoryEntry>
- <DirectoryEntry>
- <Name> Remote test3</Name>
- <Telephone>312</Telephone>
- </DirectoryEntry>
- </PhoneDirectory>

You can add More < DirectoryEntry> if needed.

Note:

- 1. the Name of the Remote xml file is changeable, for example phonebook.xml or hanlong.xml
- 2. <Telephone> can be added more than one entry, the max. is 127


2. To set Remote Phone Book For IP Phone.

- 2.1 Login the webpage of UC800
- 2.2 Click Directory->Remote Phone Book
- 2.3 Fill the path of the remote xml file in the Phone Book URL field.

For example, http://192.168.0.254/phonebook/Phonebook.xml

2.4 Fill the Name and then click SaveSet to save the configuration.



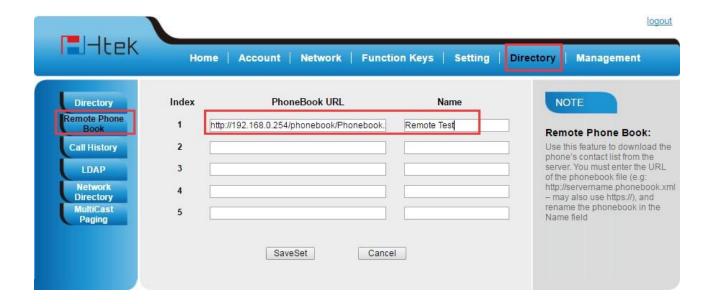

3. To check the contacts on the LCD.

3.1 Press Directory→Left Button→Left Button, and then you can see the item you set, press enter you will find the detail as following.



4. Repeat above steps, you can add no more than 5 remote phone books.